

BP1500 Tech Sheet

Balboa Water Group

Part Number: **56125-01** 4kW 800 Incoloy Element
 56126-01 With 4kW Titanium Element

Compatible Plumbing Kits (Coupling nuts and seals included)

55911 2" Tailpieces (2-Speed Pump 1)
55914 1.5" Tailpieces (2-Speed Pump 1)
55912 1" Tailpiece Inserts (Circ)
55913 One Direct Circ Pump Coupling and one 1" Tailpiece Insert

UL System Model: BP15-BP1500-BJ
Software ID: M100_200 V5
Software Version: 5.0
Hex File: BP1500_5.0_BP15TP4.hex
Configuration Signature: BB565841

Eng. Project: 3607

Base PCBs / PCBA's:

Power Board: 22117_B / 56128
Logic Board: 22121_E / 56127-01

Control Panels:

TP 600 55673-05
Software Version 2.3 and later
TP400T 50260
Software Version 2.4 and later
TP400W 50259
Software Version 2.4 and later

Auxiliary Panels

AX10A2 55919



User Interface and Programming Guide:
http://service.balboa-instruments.com/zz40940_download.zip



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

System Revision History

Part #	EPN	Date	Originator	Changes Made
55697 and 55700	2277	05-19-09	Balboa	Initial Generic Configuration 800 Incoloy and Titanium models Initial release
		06-09-09	Balboa	Minor corrections and clarification. Add J23 / J32 connection for Misc.
		08-01-09	BWG	Minor corrections, hardware revs and firmware update
		08-14-09	BWG	Tech Sheet update
	3297	12-01-09	BWG	Software update and configuration update (remove GFCI Test Feature)
	3333	02-09-10	BWG	Wiring Diagram Update to Rev B Power Board and Rev C Logic Board
	3333	02-17-10	BWG	Software update to Version 3.0
	3333	03-12-10	BWG	P1 Low Timeout Update. Add Setup Change Reference
	3479	10-11-10	BWG	RMA Tester and eFAST compatibility added, Transformer Update
55697 and 55700	3607	09-15-11	BWG	TP400 support, Auto Linking, Set Time moved to menu
	N/A	01-10-12	BWG	Correction: Pump 1 Low timeout is 30 minutes, not 120 minutes



Plumbing Fittings



2" Tailpiece kit PN 55911.

Standard 2" sockets to glue up to 2" PVC pipe.




Not Immediately Available.

1.5" Tailpiece kit PN 55914.

1.5" sockets to glue up to 1.5" PVC pipe with the I.D.


Be sure to orient the fittings so that the insert is at the 12:00 position to prevent trapped air.

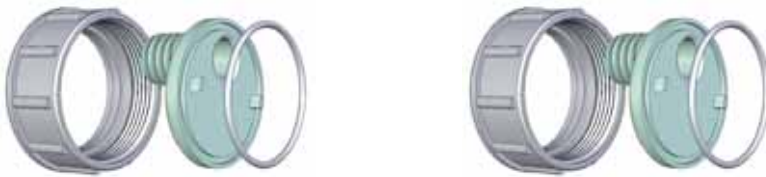

1" Circ Pump Insert kit PN 55912.

1" barb fittings for use with 1" tubing.

Be sure to orient the fittings so that the insert is at the 12:00 position to prevent trapped air.

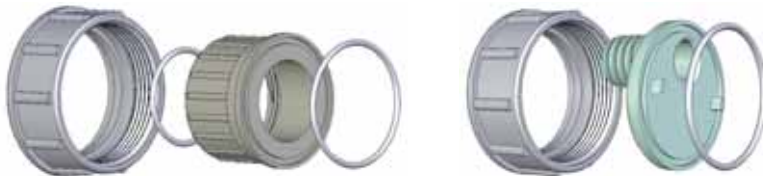

Not Immediately Available.

1" Circ Pump Insert kit PN 55913.

One fitting for direct coupling to the threaded suction of an appropriately-sized circ pump. A 1" barb fitting for use with 1" tubing is used on the other end of the heater.

Be sure to orient the fittings so that the insert is at the 12:00 position to prevent trapped air.



Setup 1 – As Manufactured


Power Requirements:

240VAC, 60Hz, 40A, Class A GFCI-protected service (Circuit Breaker rating = 50A max.)
 4 wires (Hot-Line 1, Hot-Line 2, Neutral, Ground)

System Outputs:

Pump 1	240VAC	2-Speed	12A max	30-minute timer for Low Speed, 15 Minutes for High Speed
This is the heater pump and must be the same voltage as the Ozone Must deliver a minimum of 20 GPM through heater				
Pump 2	240VAC	1-Speed	12A max	15-minute timer
Ozone	240VAC		.5A max	Uses the same relay as Pump 1 Low Must be the same voltage as heater pump
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	4kW @ 240VAC			
Misc.	J23 & J32	120VAC	4A max	Hot output (Stereo). Fused equipment or in-line fuse required.

Wiring Diagram and Settings

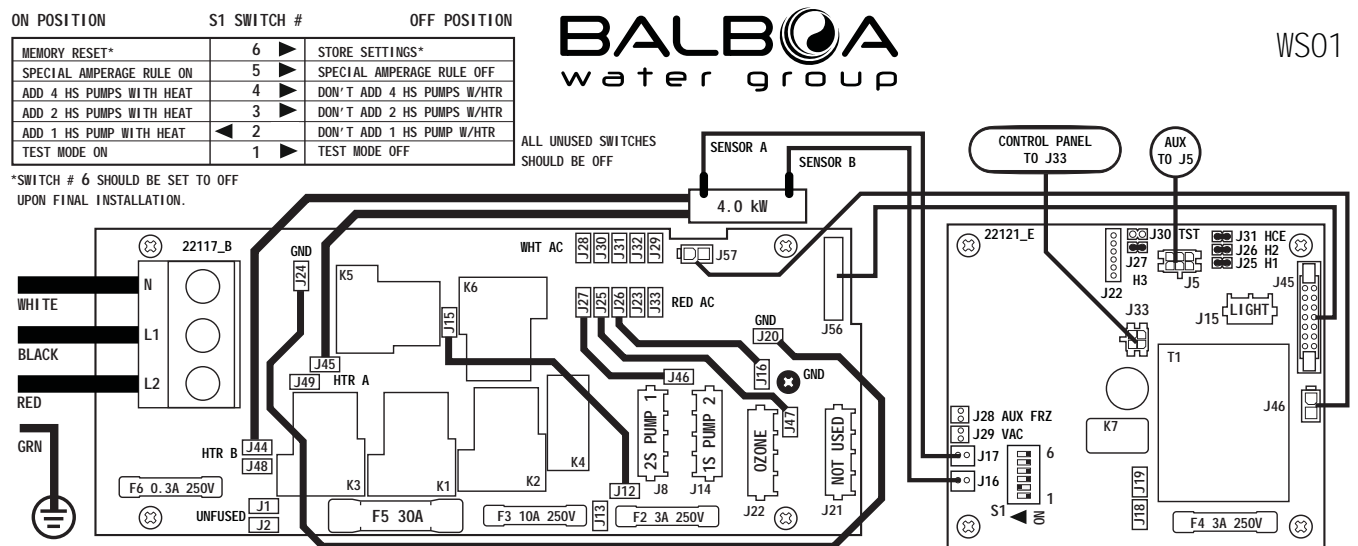

Refer to Page 3 to choose a suitable Plumbing Kit.



Setup 2


Power Requirements:

240VAC, 60Hz, 40A, Class A GFCI-protected service (Circuit Breaker rating = 50A max.)
 4 wires (Hot-Line 1, Hot-Line 2, Neutral, Ground)

System Outputs:

Pump 1	240VAC	1-Speed	12A max	15-minute timer
Pump 2	240VAC	1-Speed	12A max	15-minute timer
Circ Pump	240VAC	1-Speed	5A max	Programmable Filtration Cycles + Polling
This is the heater pump and must be the same voltage as the Ozone Must deliver a minimum of 20 GPM through heater				
Ozone	240VAC		.5A max	Uses the same relay as the Circ Pump
Must be the same voltage as heater pump				
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	4kW @ 240VAC			
Misc.	J23 & J32	120VAC	4A max	Hot output (Stereo). Fused equipment or in-line fuse required.

Wiring Diagram and Settings

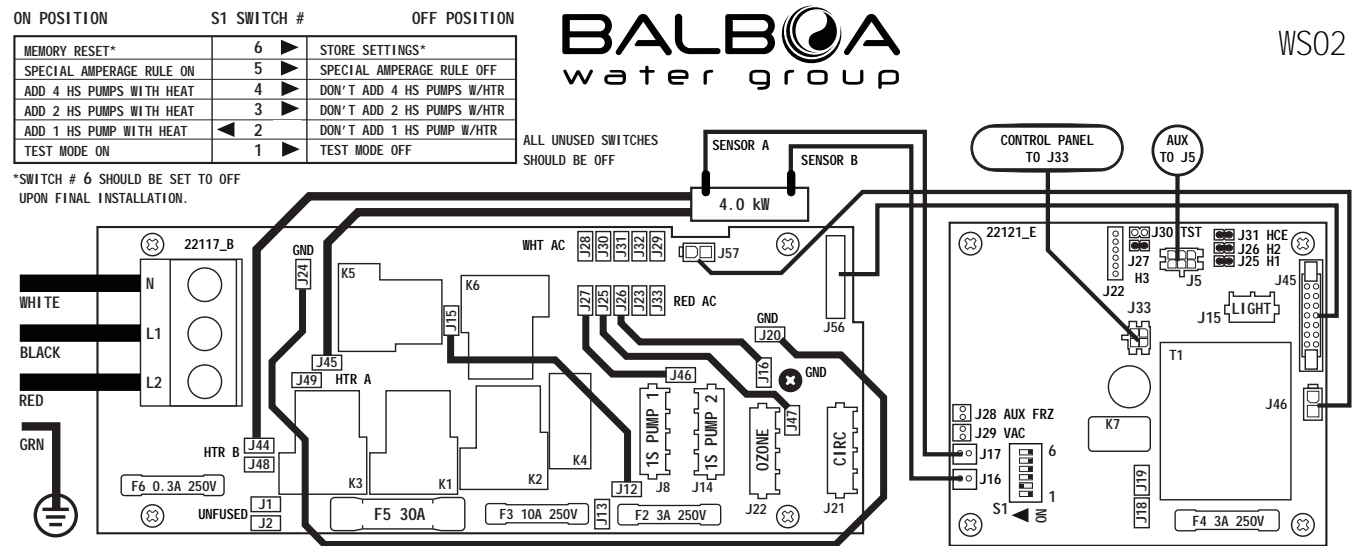

Software Configuration Changes based on Default Feature

Feature	Orig. Setup 1	Changes to
J8	2-Speed Pump 1	<i>1-Speed Pump 1</i>
J21	Not Used (non-circ)	<i>Circ Pump Enabled</i>

Refer to Page 3 to choose a suitable Plumbing Kit.

Blue indicates changes from the original Setup 1 default

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Setup 3


Power Requirements:

240VAC, 60Hz, 40A, Class A GFCI-protected service (Circuit Breaker rating = 50A max.)
 4 wires (Hot-Line 1, Hot-Line 2, Neutral, Ground)

System Outputs:

Pump 1	240VAC	2-Speed	12A max	30-minute timer for Low Speed, 15 Minutes for High Speed
This is the heater pump and must be the same voltage as the Ozone Must deliver a minimum of 20 GPM through heater				
Blower	240VAC	1-Speed	8A max	15-minute timer
Ozone	240VAC		.5A max	Uses the same relay as Pump 1 Low Must be the same voltage as heater pump
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	4kW @ 240VAC			
Misc.	J23 & J32	120VAC	4A max	Hot output (Stereo). Fused equipment or in-line fuse required.

Wiring Diagram and Settings

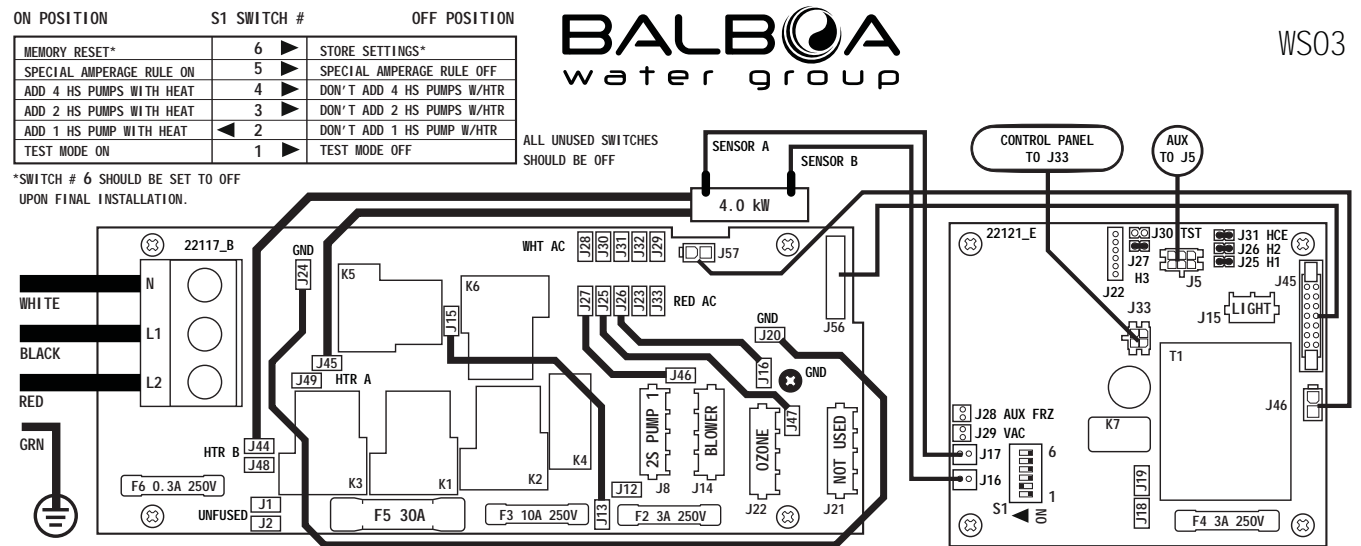

Software Configuration Changes based on Default Feature

Feature	Orig. Setup 1	Changes to
J14, TP600 Button 2, TP400 Button 4, LED 2, AX10A2	Pump 2	<i>Blower</i>

Refer to Page 3 to choose a suitable Plumbing Kit.

Blue indicates changes from the original Setup 1 default



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Setup 4


Power Requirements:

240VAC, 60Hz, 40A, Class A GFCI-protected service (Circuit Breaker rating = 50A max.)
 4 wires (Hot-Line 1, Hot-Line 2, Neutral, Ground)

System Outputs:

Pump 1	240VAC	1-Speed	12A max	15-minute timer
Blower	240VAC	1-Speed	8A max	15-minute timer
Circ Pump	240VAC	1-Speed	5A max	Programmable Filtration Cycles + Polling
This is the heater pump and must be the same voltage as the Ozone Must deliver a minimum of 20 GPM through heater				
Ozone	240VAC		.5A max	Uses the same relay as the Circ Pump
Must be the same voltage as heater pump				
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	4kW @ 240VAC			
Misc.	J23 & J32	120VAC	4A max	Hot output (Stereo). Fused equipment or in-line fuse required.

Wiring Diagram and Settings

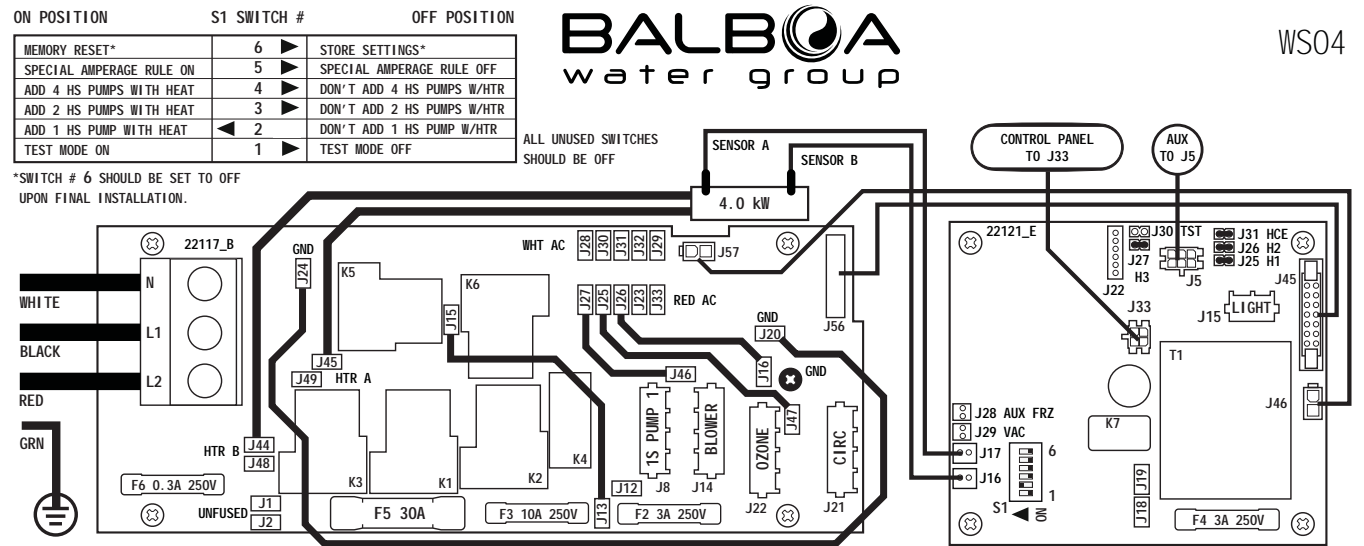

Software Configuration Changes based on Default

Feature	Orig. Setup 1	Changes to
J8	2-Speed Pump 1	1-Speed Pump 1
J14, TP600 Button 2, TP400 Button 4, LED 2, AX10A2	Pump 2	Blower
J21	Not Used (non-circ)	Circ Pump Enabled

Refer to Page 3 to choose a suitable Plumbing Kit.

Blue indicates changes from the original Setup 1 default



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Setup 5


Power Requirements:

240VAC, 60Hz, 40A, Class A GFCI-protected service (Circuit Breaker rating = 50A max.)
 4 wires (Hot-Line 1, Hot-Line 2, Neutral, Ground)

System Outputs:

Pump 1	240VAC	2-Speed	12A max	30-minute timer for Low Speed, 15 Minutes for High Speed
This is the heater pump and must be the same voltage as the Ozone Must deliver a minimum of 20 GPM through heater				
Ozone	240VAC		.5A max	Uses the same relay as Pump 1 Low Must be the same voltage as heater pump
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	4kW @ 240VAC			
Misc.	J23 & J32	120VAC	4A max	Hot output (Stereo). Fused equipment or in-line fuse required.

Wiring Diagram and Settings

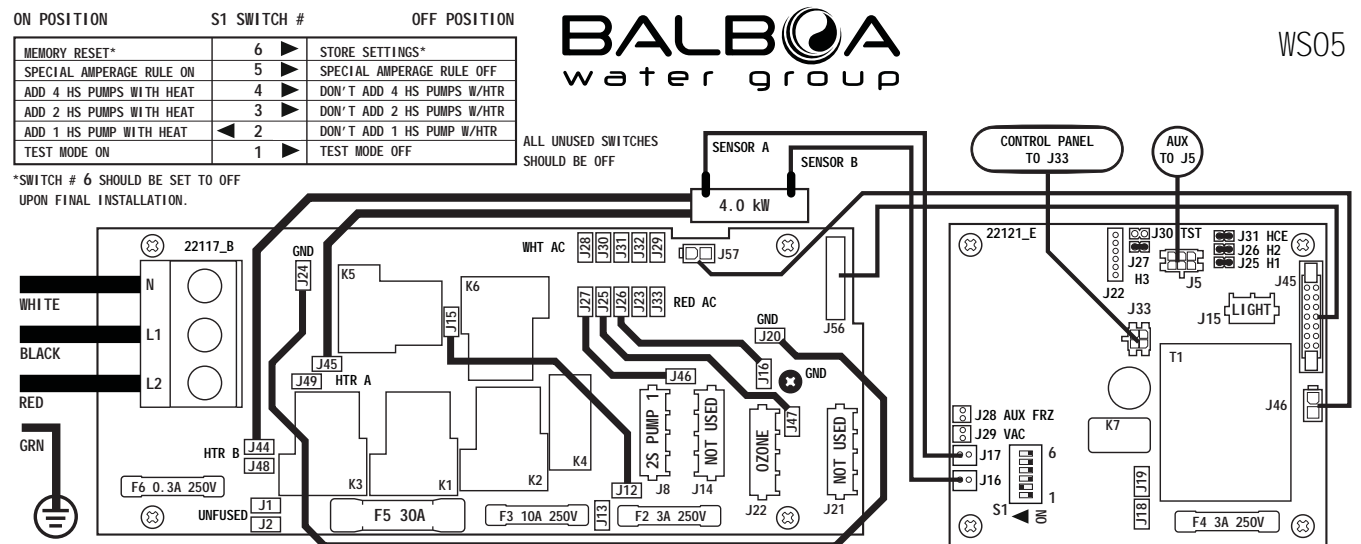

Software Configuration Changes based on Default Feature

Feature	Orig. Setup 1	Changes to
J14, TP600 Button 2, TP400 Button 4, LED 2, AX10A2	Pump 2	<i>Not Used</i>

Refer to Page 3 to choose a suitable Plumbing Kit.

Blue indicates changes from the original Setup 1 default

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.



Setup 6


Power Requirements:

240VAC, 60Hz, 40A, Class A GFCI-protected service (Circuit Breaker rating = 50A max.)
 4 wires (Hot-Line 1, Hot-Line 2, Neutral, Ground)

System Outputs:

Pump 1	240VAC	1-Speed	12A max	15-minute timer
Circ Pump	240VAC	1-Speed	5A max	Programmable Filtration Cycles + Polling
This is the heater pump and must be the same voltage as the Ozone Must deliver a minimum of 20 GPM through heater				
Ozone	240VAC		.5A max	Uses the same relay as the Circ Pump Must be the same voltage as heater pump
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	4kW @ 240VAC			
Misc.	J23 & J32	120VAC	4A max	Hot output (Stereo). Fused equipment or in-line fuse required.

Wiring Diagram and Settings

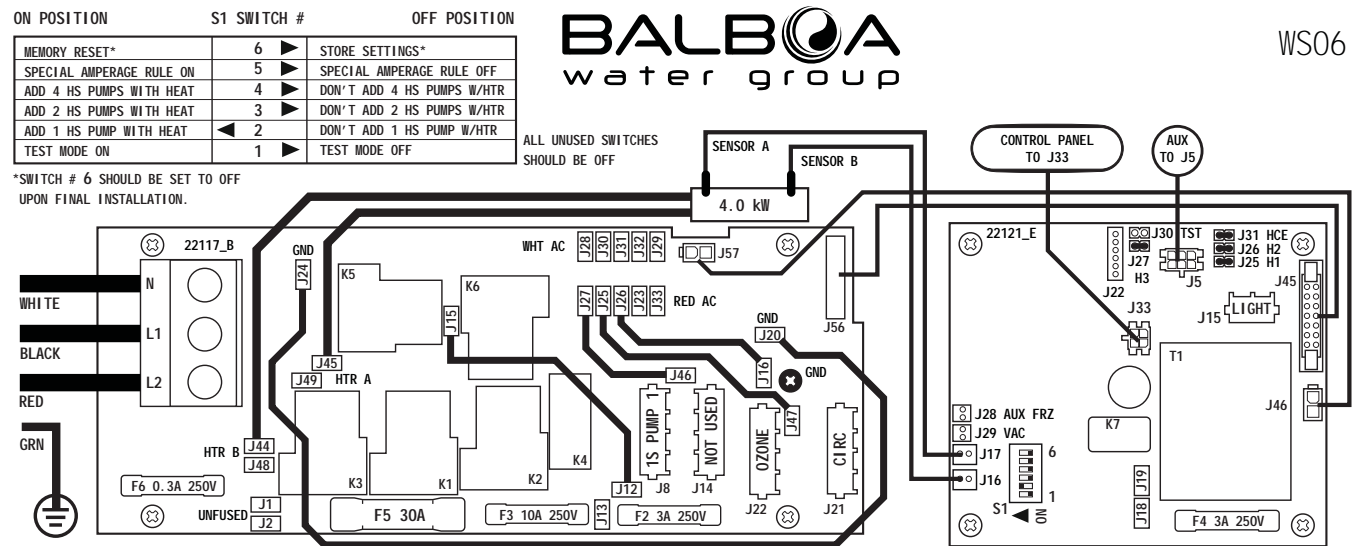

Software Configuration Changes based on Default

Feature	Orig. Setup 1	Changes to
J8	2-Speed Pump 1	1-Speed Pump 1
J14, TP600 Button 2, TP400 Button 4, LED 2, AX10A2	Pump 2	Not Used
J21	Not Used (non-circ)	Circ Pump Enabled

Refer to Page 3 to choose a suitable Plumbing Kit.

Blue indicates changes from the original Setup 1 default

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.



Setup 7


Power Requirements:

120/240VAC, 60Hz, 16/40A, Class A GFCI-protected service (Circuit Breaker = 20/50A max.),
3 or 4 wires [hot, hot (optional), neutral, ground]. **Do not use this setup with a 3 kW heater.**

System Outputs:

Pump 1	120VAC	2-Speed	12A max	30-minute timer for Low Speed, 15 Minutes for High Speed
This is the heater pump and must be the same voltage as the Ozone				
Must deliver a minimum of 20 GPM through heater				
Ozone	120VAC		.5A max	Uses the same relay as Pump 1 Low
Must be the same voltage as heater pump				
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	1kW @ 120VAC or 4kW @ 240VAC			
Misc.	J23 & J32	<i>Not Applicable with 120V Heater.</i>		

Wiring Diagram and Settings

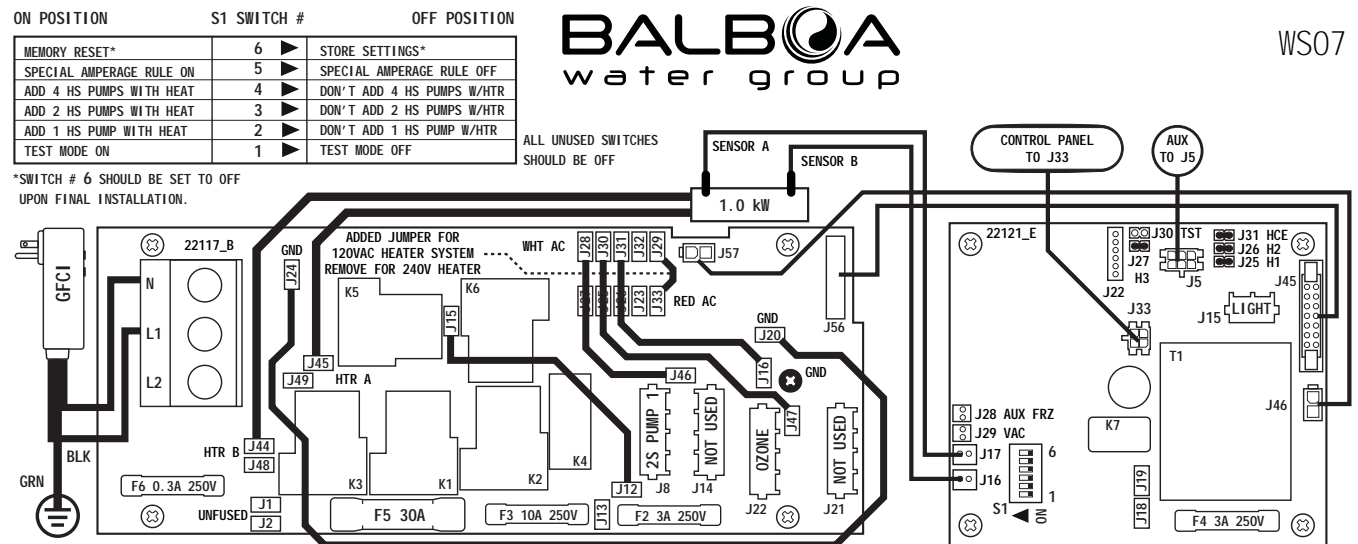

Software Configuration Changes based on Default Feature

Feature	Orig. Setup 1	Changes to
J14, TP600 Button 2, TP400 Button 4, LED 2, AX10A2	Pump 2	<i>Not Used</i>

120v to 240v heater conversion instructions:

- 1, Conversion must be performed by a qualified, licensed electrician.
- 2, Disconnect from power and remove power cord.
- 3, Completely remove jumper wire between J29 and J33 and discard.
- 4, Install 240V power conductors; Line 1, Line 2 and Neutral to main terminal block (TB1)

Refer to Page 3 to choose a suitable Plumbing Kit.

Blue indicates changes from the original Setup 1 default



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Setup 8


Power Requirements:

120/240VAC, 60Hz, 16/40A, Class A GFCI-protected service (Circuit Breaker = 20/50A max.), 3 or 4 wires [hot, hot (optional), neutral, ground]. **Do not use this setup with a 3 kW heater.**

System Outputs:

Pump 1	120VAC	1-Speed	12A max	15-minute timer
Circ Pump	120VAC	1-Speed	1.5A max	Programmable Filtration Cycles + Polling
This is the heater pump and must be the same voltage as the Ozone				
Must deliver a minimum of 20 GPM through heater				
Ozone	120VAC		.5A max	Uses the same relay as the Circ Pump
Must be the same voltage as heater pump				
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	1kW @ 120VAC or 4kW @ 240VAC			
Misc.	J23 & J32	<i>Not Applicable with 120V Heater.</i>		

Wiring Diagram and Settings

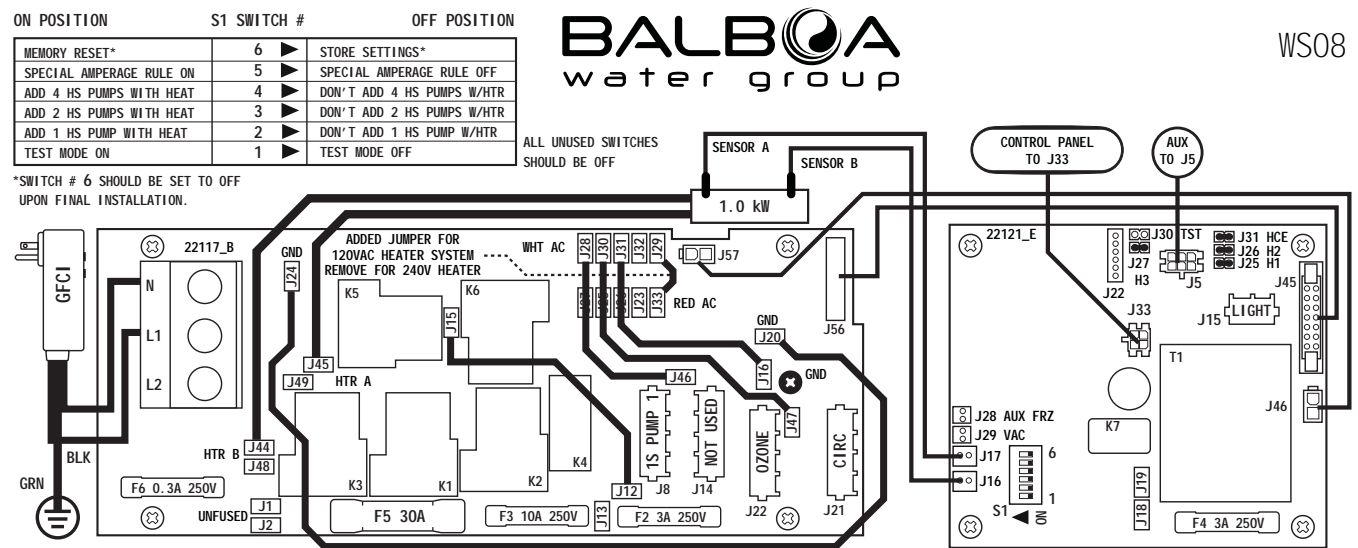

Software Configuration Changes based on Default

Feature	Orig. Setup 1	Changes to
J8	2-Speed Pump 1	<i>1-Speed Pump 1</i>
J14, TP600 Button 2, TP400 Button 4, LED 2, AX10A2	Pump 2	<i>Not Used</i>
J21	Not Used (non-circ)	<i>Circ Pump Enabled</i>

120v to 240v heater conversion instructions:

See previous page.

Refer to Page 3 to choose a suitable Plumbing Kit.

Blue indicates changes from the original Setup 1 default



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 B2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Setup Changes with DIP Switch 1 ON

Read and understand these instructions before beginning this process.


Know the Setup Number you want before you power up the spa and wait to power up the spa until you're ready to change the Setup Number.

The system must be in Test Mode, so move Switch 1 to the ON position. The Test Menu will then be available.

Power up the spa, and press any button once to Link the panel. (Note: Switch 1 can be moved to the ON position immediately after power-up, if preferred - Danger! High Voltage will be present!)

You will have 1 minute to complete the setup change after you manually exit Priming Mode. (Once familiar with the process, the Setup change should take less than 15 seconds.)

→ As soon as Switch #1 is placed in the ON position, The temperature will show "T" after it instead of F or C, indicating the System is in Test Mode

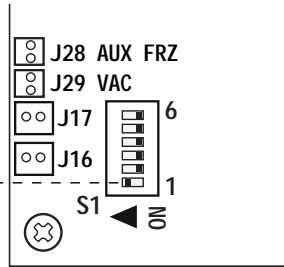

DANGER! HIGH VOLTAGE WILL BE ACCESSIBLE! SERVICE TECHNICIAN ONLY!


Move DIP Switch 1 (on S1 on the Logic circuit board) to ON.

The system will enter Test Mode.

Moving DIP Switch 1 to OFF will exit Test Mode.



When the panel displays RUN PMPS PURG AIR, press any Temperature button ONCE to exit Priming Mode. You should see "---T" where the T indicates the system is in Test Mode.



Continued on Next Page.




Setup Changes – Continued

Again, **You will have 1 minute** to complete the setup change after you manually exit Priming Mode.

Immediately after exiting Priming Mode, press this sequence of buttons: Warm*, Light, Warm, Warm, Warm, Warm. Continue to press Warm until the display shows the Setup Number (S-01, S-02, etc.) you want to switch to. When the correct setup number is showing, press Light once, and the system will reset, using the newly-selected Setup from that point on.

Move DIP Switch 1 to the OFF position to take the spa out of Test Mode. °F or °C will replace °T.


Using a permanent marker, write the Setup number on the Setup label mounted inside the system lid (right). This is very important to any service person in the future who may need to replace a circuit board or system and needs to change the Setup on a replacement part while in the field.

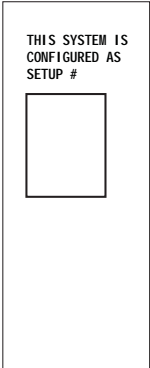

NOTE: Changing the Setup may require wiring changes as well - refer to the wiring diagram or wiring diagram addendum.

Key

- Indicates Flashing or Changing Segment
- Indicates Alternating or Progressive Message - every 1/2 second
- ⌄ A temperature button, used for "Action"
- ☼ Light or dedicated "Choose" button, depending on control panel configuration
- Waiting time - varies depending on function

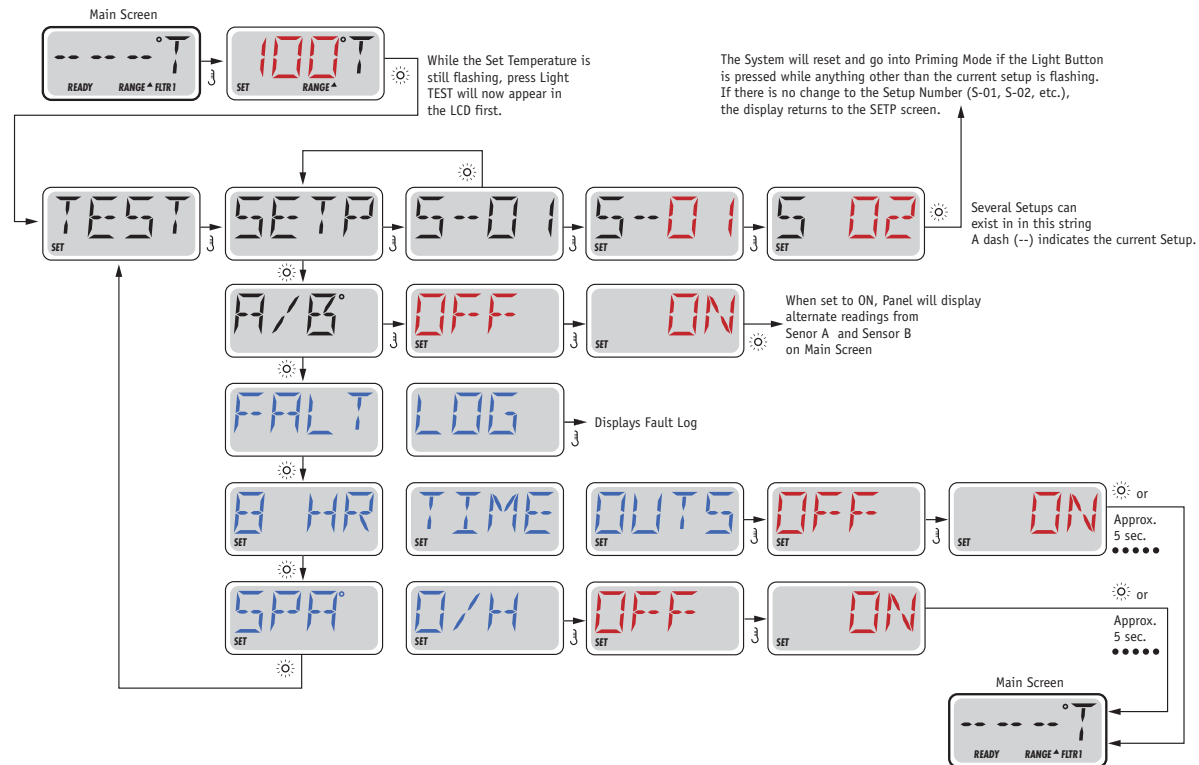

*If the Control Panel does not have a Warm (Up) button, but rather a single Temp button, use the Temp button in place of the Warm button in the instruction above. (The flow chart assumes a single Temperature Button.)



Configuration Options

General Features

Feature	Default
Pump 1 in Filter Cycle (Circ Only)	No
Pump 1 Low Timer	30 Minutes
General Pump Timer	15 Minutes
Blower Timer	15 Minutes
Mister Timer (N/A)	15 Minutes
Light Timer	240 Minutes
Circ	Like P1 Low
Cleanup Cycle	<i>30 Minutes</i>
Cleaup as Preference setting	Yes
Ozone	Always
Ozone Suppression	OFF
Pump Purge	60 Seconds
Blower Purge	30 Seconds
Mister Purge (N/A)	5 Seconds

Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options

Temperature Features

Feature Default

Temperature Display

°F

All temperatures must be specified in °F. The system converts °F to °C dynamically. If Celsius is required for default settings, choose a desired °C value that (after rounding) corresponds to a Fahrenheit value.

°C	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
°F	39	41	43	45	46	48	50	52	54	55	57	59	61	63	64	66	68	70	72
°C	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
°F	73	75	77	79	81	82	84	86	88	90	91	93	95	97	99	100	102	104	

Hi-Range Min. Set Temp

80°F

Hi-Range Max. Set Temp

104°F

Hi-Range Default Temp*

100°F

Lo-Range Min. Set Temp

50°F

Lo-Range Max. Set Temp

99°F

Lo-Range Default Temp*

70°F

Freeze Threshold

44°F

Temp Lock Type

Temp + Settings

Time Features

Feature

Default

Time Format*

12 Hour

Filter 1 Start Hour*

8:00 PM (20:00)

Filter 1 Duration*

2 Hours

Filter Cycle 2 Default*

OFF

Filter 2 Start Hour*

8:00 AM (08:00)

Filter 2 Duration*

15 Minutes

Light Cycle

Disabled

Light Cycle Default*

OFF

Light Cycle Start Hour*

9:00 PM (21:00)

Light Cycle Duration*

15 Minutes

**May be changed by end-user (if Enabled)*



Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options

Reminder Features

Feature	Default
Reminders Shown*	<i>Yes</i>
Check pH	<i>OFF</i>
Check Sanitizer	<i>OFF</i>
Clean Filter	30 Days
Test GFCI	<i>65 Days</i>
Drain Water	<i>100 Days</i>
Change Cartridge	OFF
Clean Cover	<i>OFF</i>
Treat Wood	<i>OFF</i>
Change Filter	365 Days

Special Features

Feature	Default
Special Amperage Rule 1	No Limitation
Special Amperage Rule 2	No Limitation
Drain Mode	Disabled
Demo Mode	Disabled
Automatic GFCI Test	Disabled
Ozone Slaved to Heater Pump	<i>Yes</i>

**Editable by end-user*

Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options


TP400 Control Panel Features

Feature	TP400T	TP400W
Button 1	<i>Temperature</i>	Up
Button 2	<i>Jets 1</i>	Down
Button 3	<i>Light 1</i>	Light 1
Button 4	<i>Jets 2</i>	Jets 1
LED B1	<i>Heat ON</i>	Heat ON
LED B2	<i>Jets 1</i>	Unused
LED B3	<i>Light 1</i>	Light 1
LED B4	<i>Jets 2</i>	Jets 1

TP400T

50260 ►

Includes Overlay PN 12511

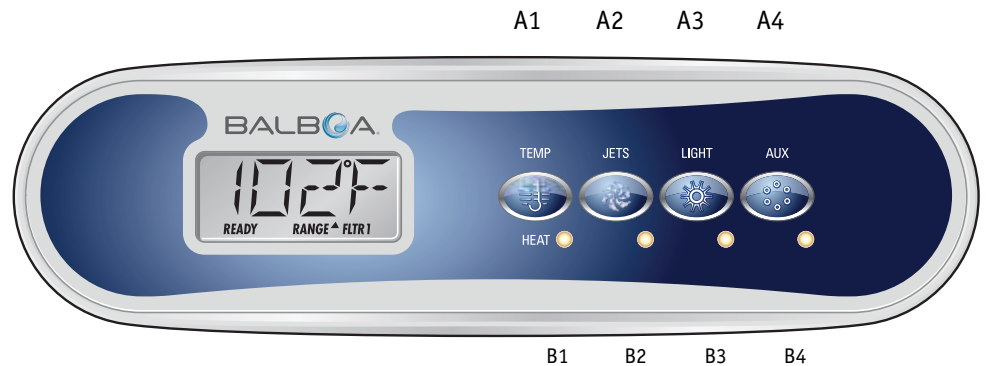

TP400W

50259 ►

Includes Overlay PN 12510

TP400W requires the use of an AX10A2 in Setups 1 – 4.



Download the User Interface and Programming Guide here:

http://service.balboa-instruments.com/zz40940_download.zip

Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Template 40941_J 04-02-10

Configuration Options

TP600 Control Panel Features

Feature	Default
Button 1	<i>Jets 1</i>
Button 2	<i>Jets 2</i>
Button 3	<i>Flip</i>
Button 4	<i>Up</i>
Button 5	<i>Light 1</i>
Button 6	<i>Down</i>
LED 1	<i>Jets 1</i>
LED 2	<i>Jets 2</i>
LED 3	<i>Light 1</i>
LED 4	<i>Heat ON</i>

TP600

55673-05 ►
Includes overlay PN12511



Download the User Interface and Programming Guide here:
http://service.balboa-instruments.com/zz40940_download.zip
Blue Indicates New Custom Configuration Default (Setup 1)



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options


Auxilliary Panel Features

Feature	Default
Aux Button A1	Jets 1
Aux Button A2	Jets 2
Aux Button A3	<i>Unused</i>
Aux Button A4	Light

AX10 A1	No O/L	52803	
AX10 A2	AUX O/L	55919	▶
AX10 A3	No O/L	52805	
AX10 A4	No O/L	52806	



AX20 A1A2	No O/L	52800
AX20 A1A3	No O/L	52801
AX20 A1A4	No O/L	52802

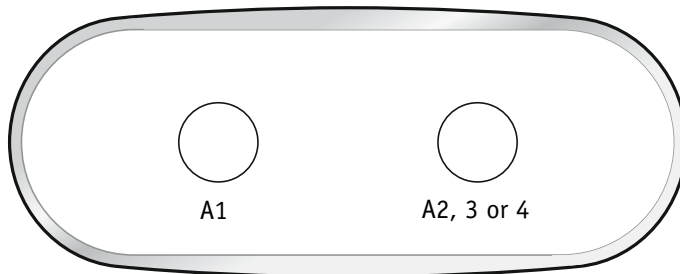

AX40	No O/L	52799
------	--------	-------

