

BP15P12C Tech Sheet

Balboa Water Group

Part Number: **56312** 4kW 800 Incoloy Element
 56313 With 4kW Titanium Element

Compatible Plumbing Kits (Coupling nuts and seals included)

55911 2" Tailpieces (2-Speed Pump 1)
55914 1.5" Tailpieces (2-Speed Pump 1)
55912 1" Tailpiece Inserts (Circ)
55913 One Direct Circ Pump Coupling and one 1" Tailpiece Insert

UL System Model: BP15-BP15P12C-BJ
Software ID: M100_200 V6
Software Version: 6.0
Hex File: BP1500_6.0_BP15P12C.hex
Configuration Signature: EB5C7A70

Eng. Project: 3882

Base PCBs / PCBA's:

Power Board: 22117_B / 56325
Logic Board: 22121_E / 56314

Control Panels:

TP 600 55673-05
Software Version 2.3 and later
TP400T 50260
Software Version 2.4 and later
TP400W 50259
Software Version 2.4 and later



User Interface and Programming Guide:
http://service.balboa-instruments.com/zz40940_download.zip



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

System Revision History

Part #	EPN	Date	Originator	Changes Made
56312 and 56313	3879	08-08-12	BWG	New Revolution system with 2-Speed Pump 1 plus Circ., plus other setups that do not require Pump 2 or Blower.



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Plumbing Fittings



2" Tailpiece kit PN 55911.

Standard 2" sockets to glue up to 2" PVC pipe.



Not Immediately Available.

1.5" Tailpiece kit PN 55914.

1.5" sockets to glue up to 1.5" PVC pipe with the I.D.

Be sure to orient the fittings so that the insert is at the 12:00 position to prevent trapped air.



1" Circ Pump Insert kit PN 55912.

1" barb fittings for use with 1" tubing.

Be sure to orient the fittings so that the insert is at the 12:00 position to prevent trapped air.



Not Immediately Available.

1" Circ Pump Insert kit PN 55913.

One fitting for direct coupling to the threaded suction of an appropriately-sized circ pump. A 1" barb fitting for use with 1" tubing is used on the other end of the heater.

Be sure to orient the fittings so that the insert is at the 12:00 position to prevent trapped air.



Setup 1 @ 240V (As Manufactured)


Power Requirements:

240VAC, 60Hz, 40A, Class A GFCI-protected service (Circuit Breaker rating = 50A max.)
 4 wires (Hot-Line 1, Hot-Line 2, Neutral, Ground)


System Outputs:

Pump 1	240VAC	2-Speed	12A max	30-minute timer for Low Speed, 15 Minutes for High Speed
Circ Pump	240VAC	1-Speed	5A max	Programmable Filtration Cycles + Polling
Ozone	240VAC	.5A max	Uses the same relay as the Circ Pump	Must be the same voltage as heater pump
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	4kW @ 240VAC			
Misc.	J23 & J32	120VAC	4A max	Hot output (Stereo). Fused equipment or in-line fuse required.

Wiring Diagram and Settings

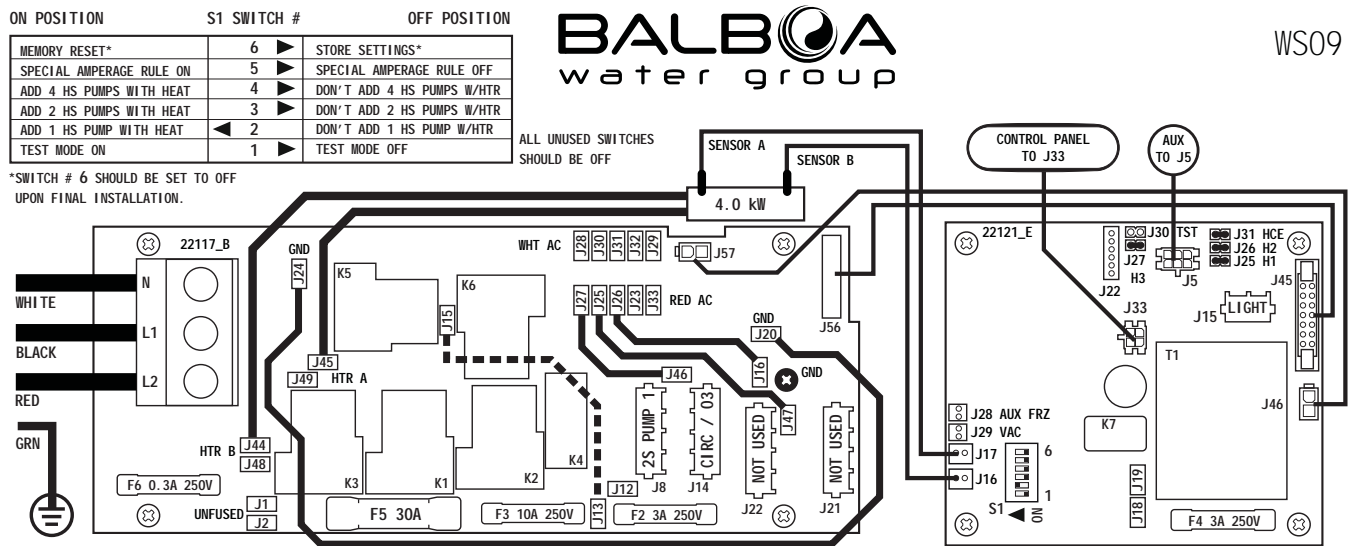

Buttons and LEDs labeled "AUX" will not operate any equipment.

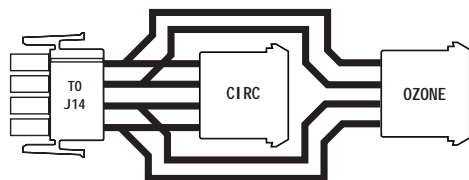

Output Splitter Part Number 22934 must be used.



Refer to Page 3 to choose a suitable Plumbing Kit.

Blue indicates changes from the original Setup 1 default

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Setup 1 @ 120V


Power Requirements:

120/240VAC, 60Hz, 16/40A, Class A GFCI-protected service (Circuit Breaker = 20/50A max.), 3 or 4 wires [hot, hot (optional), neutral, ground]. **Do not use this setup with a 3 kW heater.**

System Outputs:


Pump 1	120VAC	2-Speed	12A max	30-minute timer for Low Speed, 15 Minutes for High Speed
Circ Pump	120VAC	1-Speed	1.5A max	Programmable Filtration Cycles + Polling
Ozone	120VAC	.5A max	Uses the same relay as the Circ Pump	Must be the same voltage as heater pump
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	1kW @ 120VAC or 4kW @ 240VAC			
Misc.	J23 & J32	<i>Not Applicable with 120V Heater.</i>		

Wiring Diagram and Settings

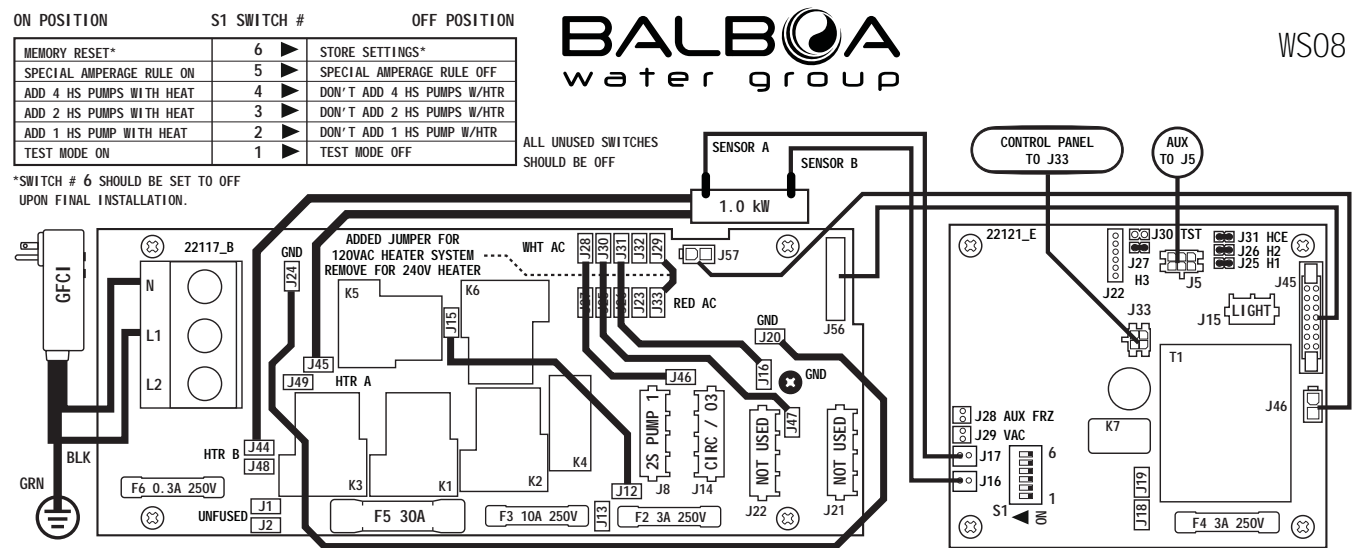

120v to 240v heater conversion instructions:

- 1, Conversion must be performed by a qualified, licensed electrician.
- 2, Disconnect from power and remove power cord.
- 3, Completely remove jumper wire between J29 and J33 and discard.
- 4, Install 240V power conductors; Line 1, Line 2 and Neutral to main terminal block (TB1)

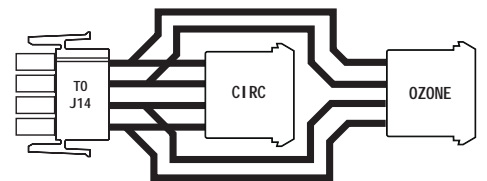

Output Splitter Part Number 22934 must be used.

Refer to Page 3 to choose a suitable Plumbing Kit.

Blue indicates changes from the original Setup 1 default

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Setup 2 @ 240V


Power Requirements:

240VAC, 60Hz, 40A, Class A GFCI-protected service (Circuit Breaker rating = 50A max.)
 4 wires (Hot-Line 1, Hot-Line 2, Neutral, Ground)

System Outputs:

Pump 1	240VAC	2-Speed	12A max	30-minute timer for Low Speed, 15 Minutes for High Speed
This is the heater pump and must deliver a minimum of 20 GPM through heater				
Ozone	240VAC		.5A max	Uses the same relay as the Circ Pump Must be the same voltage as heater pump
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	4kW @ 240VAC			
Misc.	J23 & J32	120VAC	4A max	Hot output (Stereo). Fused equipment or in-line fuse required.

Wiring Diagram and Settings

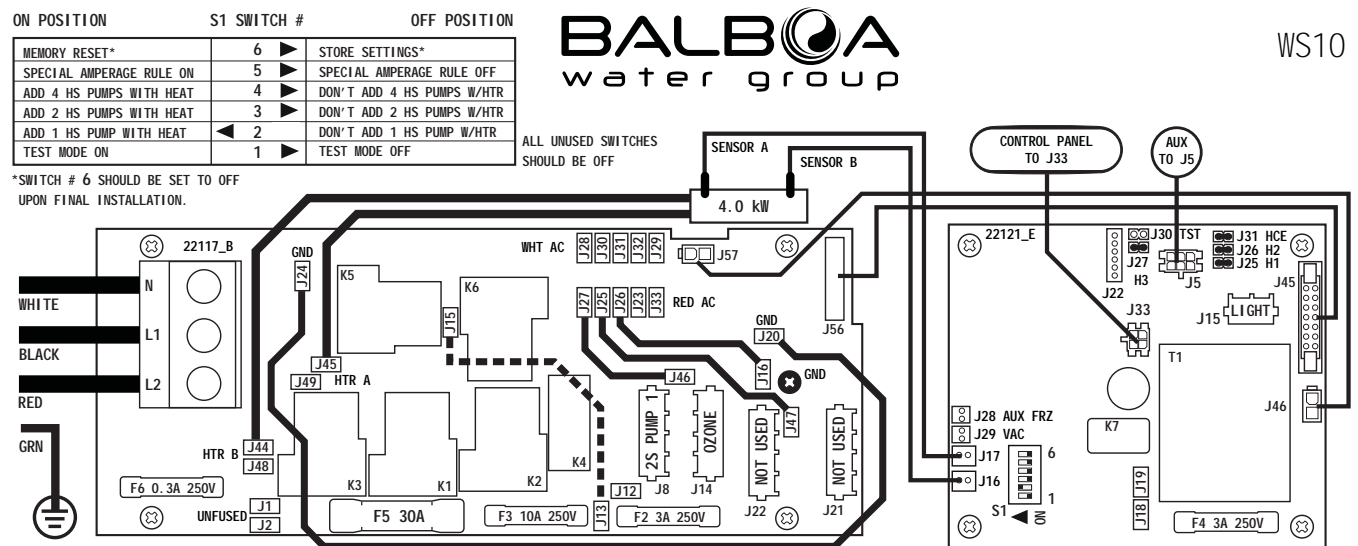

Buttons and LEDs labeled "AUX" will not operate any equipment.

Software Configuration Changes based on Default Feature

J14 Ozone and Circ* *Ozone Only*

*Output Splitter 22934 is not needed in this configuration.



Refer to Page 3 to choose a suitable Plumbing Kit.
Blue indicates changes from the original Setup 1 default

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 B2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Setup 2 @ 120V


Power Requirements:

120/240VAC, 60Hz, 16/40A, Class A GFCI-protected service (Circuit Breaker = 20/50A max.), 3 or 4 wires [hot, hot (optional), neutral, ground]. **Do not use this setup with a 3 kW heater.**

System Outputs:

Pump 1	120VAC	2-Speed	12A max	30-minute timer for Low Speed, 15 Minutes for High Speed
	This is the heater pump and must deliver a minimum of 20 GPM through heater			
Ozone	120VAC		.5A max	Uses the same relay as the Circ Pump
	Must be the same voltage as heater pump			
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	1kW @ 120VAC or 4kW @ 240VAC			
Misc.	J23 & J32	<i>Not Applicable with 120V Heater.</i>		

Wiring Diagram and Settings

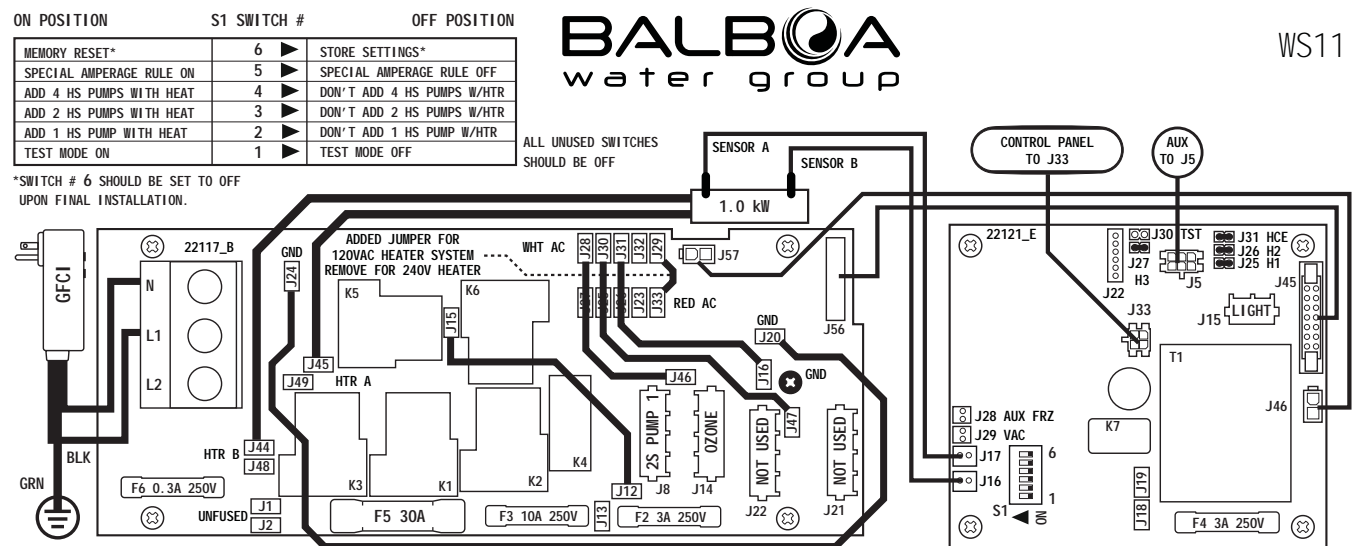

Software Configuration Changes based on Default Feature

J14 Ozone and Circ* *Ozone Only*

*Output Splitter 22934 is not needed in this configuration.

120v to 240v heater conversion instructions:

See Page 5.

Refer to Page 3 to choose a suitable Plumbing Kit.

Blue indicates changes from the original Setup 1 default

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.



Setup 3 @ 240V


Power Requirements:

240VAC, 60Hz, 40A, Class A GFCI-protected service (Circuit Breaker rating = 50A max.)
 4 wires (Hot-Line 1, Hot-Line 2, Neutral, Ground)

System Outputs:

Pump 1	240VAC	1-Speed	12A max	15-minute timer
Circ Pump	240VAC	1-Speed	5A max	Programmable Filtration Cycles + Polling
This is the heater pump and must be the same voltage as the Ozone Must deliver a minimum of 20 GPM through heater				
Ozone	240VAC		.5A max	Uses the same relay as the Circ Pump Must be the same voltage as heater pump
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	4kW @ 240VAC			
Misc.	J23 & J32	120VAC	4A max	Hot output (Stereo). Fused equipment or in-line fuse required.


Wiring Diagram and Settings

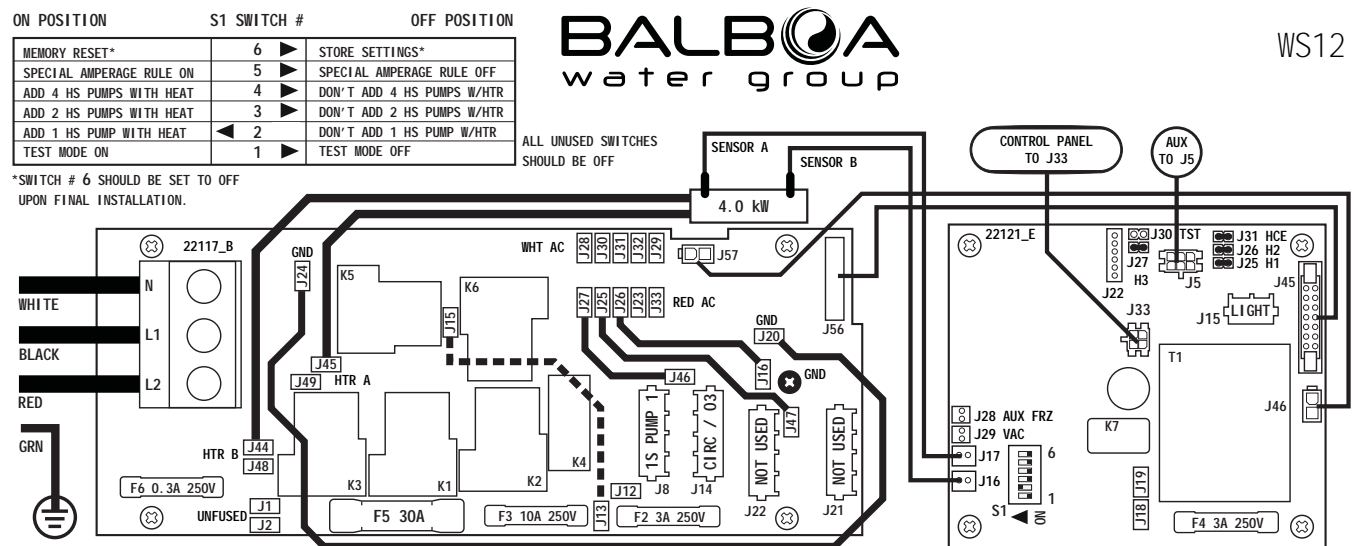

Buttons and LEDs labeled "AUX" will not operate any equipment.

Software Configuration Changes based on Default Feature

J8 2-Speed Pump 1 *1-Speed Pump 1*

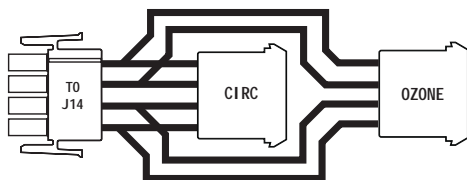

Output Splitter Part Number 22934 must be used.



Refer to Page 3 to choose a suitable Plumbing Kit.

Blue indicates changes from the original Setup 1 default

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Setup 3 @ 120V

Power Requirements:

120/240VAC, 60Hz, 16/40A, Class A GFCI-protected service (Circuit Breaker = 20/50A max.), 3 or 4 wires [hot, hot (optional), neutral, ground]. **Do not use this setup with a 3 kW heater.**

System Outputs:

Pump 1	120VAC	1-Speed	12A max	15-minute timer
Circ Pump	120VAC	1-Speed	1.5A max	Programmable Filtration Cycles + Polling
This is the heater pump and must be the same voltage as the Ozone				
Must deliver a minimum of 20 GPM through heater				
Ozone	120VAC		.5A max	Uses the same relay as the Circ Pump
Must be the same voltage as heater pump				
Spa Light	12VAC	On/Off	1A max	4-Hour timer.
Heater	1kW @ 120VAC or 4kW @ 240VAC			
Misc.	J23 & J32	<i>Not Applicable with 120V Heater.</i>		


Wiring Diagram and Settings

ON POSITION	S1 SWITCH #	OFF POSITION
MEMORY RESET*	6	STORE SETTINGS*
SPECIAL AMPERAGE RULE ON	5	SPECIAL AMPERAGE RULE OFF
ADD 4 HS PUMPS WITH HEAT	4	DON'T ADD 4 HS PUMPS W/HTR
ADD 2 HS PUMPS WITH HEAT	3	DON'T ADD 2 HS PUMPS W/HTR
ADD 1 HS PUMP WITH HEAT	2	DON'T ADD 1 HS PUMP W/HTR
TEST MODE ON	1	TEST MODE OFF

*SWITCH # 6 SHOULD BE SET TO OFF UPON FINAL INSTALLATION.




WS13

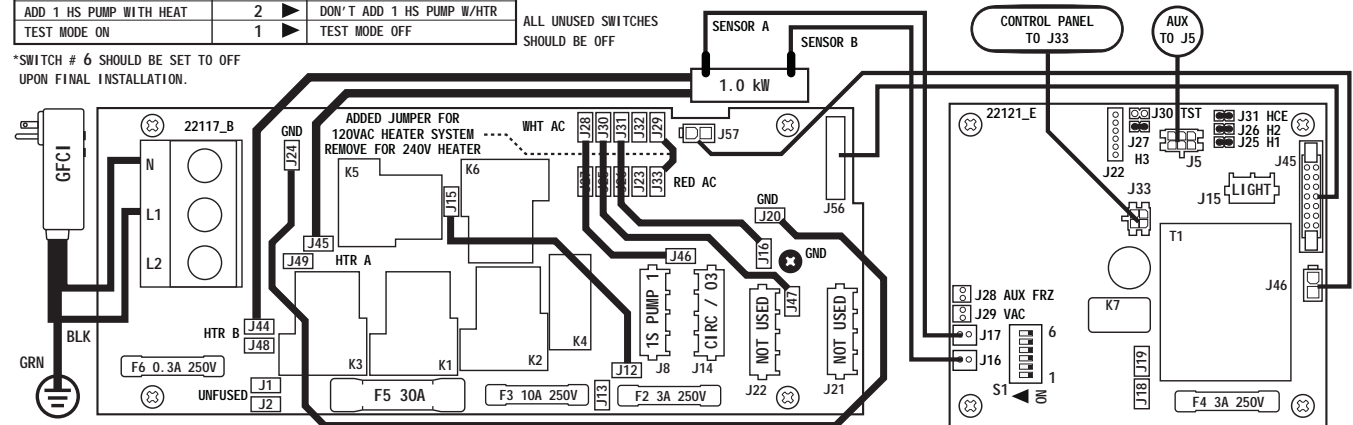

Software Configuration Changes based on Default Feature

J8 2-Speed Pump 1 *1-Speed Pump 1*

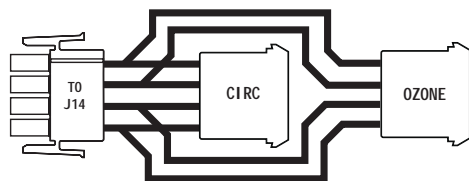

Output Splitter Part Number 22934 must be used.

120v to 240v heater conversion instructions: See Page 5

Refer to Page 3 to choose a suitable Plumbing Kit.

Blue indicates changes from the original Setup 1 default



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Setup Changes with DIP Switch 1 ON


Read and understand these instructions before beginning this process.

Know the Setup Number you want before you power up the spa and wait to power up the spa until you're ready to change the Setup Number.

The system must be in Test Mode, so move Switch 1 to the ON position. The Test Menu will then be available.

Power up the spa, and press any button once to Link the panel. (Note: Switch 1 can be moved to the ON position immediately after power-up, if preferred - Danger! High Voltage will be present!)

You will have 1 minute to complete the setup change after you manually exit Priming Mode. (Once familiar with the process, the Setup change should take less than 15 seconds.)

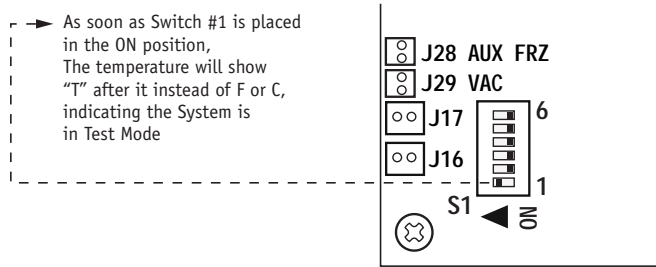

DANGER! HIGH VOLTAGE WILL BE ACCESSIBLE! SERVICE TECHNICIAN ONLY!


Move DIP Switch 1 (on S1 on the Logic circuit board) to ON.

The system will enter Test Mode.

Moving DIP Switch 1 to OFF will exit Test Mode.



When the panel displays RUN PMPS PURG AIR, press any Temperature button ONCE to exit Priming Mode. You should see "---T" where the T indicates the system is in Test Mode.



Continued on Next Page.




Setup Changes – Continued

Again, **You will have 1 minute** to complete the setup change after you manually exit Priming Mode.

Immediately after exiting Priming Mode, press this sequence of buttons: Warm*, Light, Warm, Warm, Warm, Warm. Continue to press Warm until the display shows the Setup Number (S-01, S-02, etc.) you want to switch to. When the correct setup number is showing, press Light once, and the system will reset, using the newly-selected Setup from that point on.

Move DIP Switch 1 to the OFF position to take the spa out of Test Mode. °F or °C will replace °T.


Using a permanent marker, write the Setup number on the Setup label mounted inside the system lid (right). This is very important to any service person in the future who may need to replace a circuit board or system and needs to change the Setup on a replacement part while in the field.

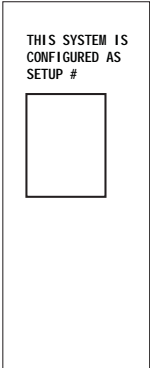

NOTE: Changing the Setup may require wiring changes as well - refer to the wiring diagram or wiring diagram addendum.

Key

- █ Indicates Flashing or Changing Segment
- █ Indicates Alternating or Progressive Message - every 1/2 second
- ⏏ A temperature button, used for "Action"
- ☀ Light or dedicated "Choose" button, depending on control panel configuration
- Waiting time - varies depending on function

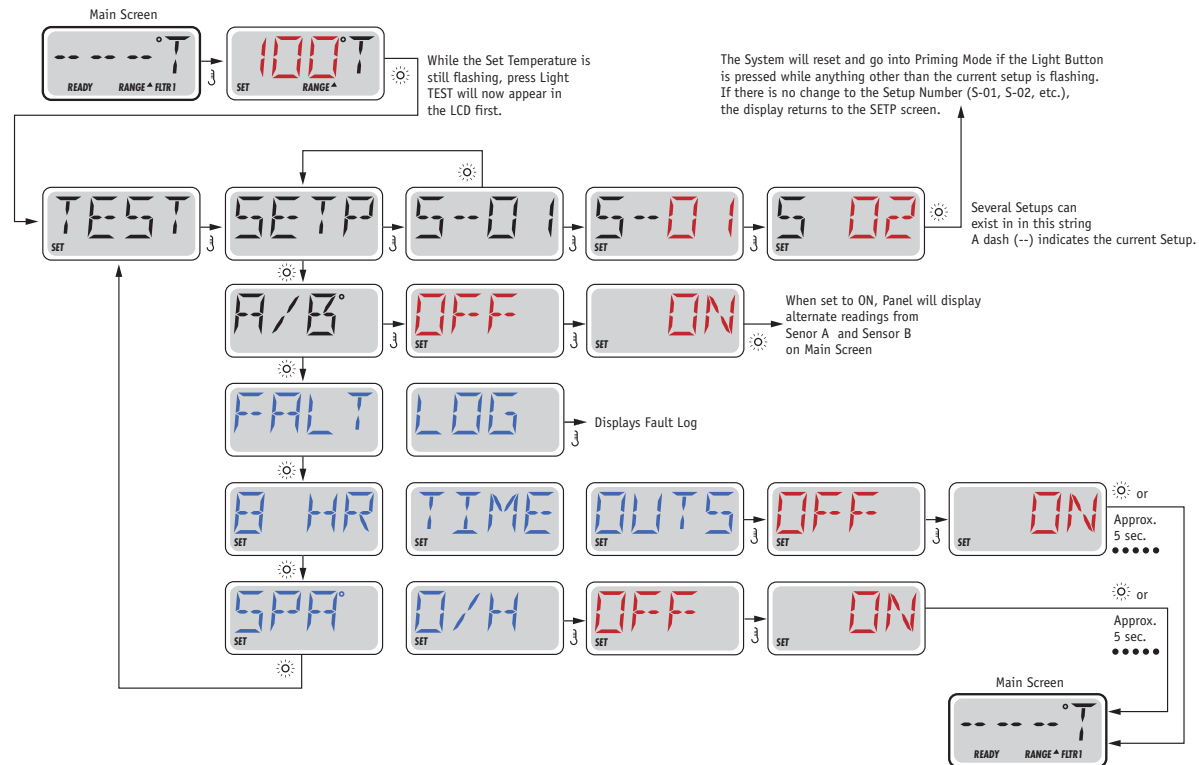

*If the Control Panel does not have a Warm (Up) button, but rather a single Temp button, use the Temp button in place of the Warm button in the instruction above. (The flow chart assumes a single Temperature Button.)



Configuration Options

General Features

Feature	Default
Pump 1 in Filter Cycle (Circ Only)	No
Pump 1 Low Timer	30 Minutes
General Pump Timer	15 Minutes
Blower Timer	15 Minutes
Mister Timer (N/A)	15 Minutes
Light Timer	240 Minutes
Circ	Like P1 Low
Cleanup Cycle	<i>30 Minutes</i>
Cleaup as Preference setting	Yes
Ozone	With Heater Pump*
Ozone Suppression	OFF
Pump Purge	60 Seconds
Blower Purge	30 Seconds
Mister Purge (N/A)	5 Seconds

* The Heater Pump can be either a Circ Pump or Pump 1 Low.



Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options

Temperature Features

Feature Default

Temperature Display °F

All temperatures must be specified in °F. The system converts °F to °C dynamically. If Celsius is required for default settings, choose a desired °C value that (after rounding) corresponds to a Fahrenheit value.

°C	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
°F	39	41	43	45	46	48	50	52	54	55	57	59	61	63	64	66	68	70	72
°C	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
°F	73	75	77	79	81	82	84	86	88	90	91	93	95	97	99	100	102	104	

Hi-Range Min. Set Temp	80°F
Hi-Range Max. Set Temp	104°F
Hi-Range Default Temp*	100°F
Lo-Range Min. Set Temp	50°F
Lo-Range Max. Set Temp	80°F
Lo-Range Default Temp*	70°F
Freeze Threshold	44°F
Temp Lock Type	Temp + Settings

Time Features

Feature Default

Time Format*	12 Hour
Filter 1 Start Hour*	8:00 PM (20:00)
Filter 1 Duration*	2 Hours
Filter Cycle 2 Default*	OFF
Filter 2 Start Hour*	8:00 AM (08:00)
Filter 2 Duration*	15 Minutes
Light Cycle	Disabled
Light Cycle Default*	OFF
Light Cycle Start Hour*	9:00 PM (21:00)
Light Cycle Duration*	15 Minutes

**May be changed by end-user (if Enabled)*



Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options

Reminder Features

Feature	Default
Reminders Shown*	<i>Yes</i>
Check pH	<i>OFF</i>
Check Sanitizer	<i>OFF</i>
Clean Filter	30 Days
Test GFCI	<i>65 Days</i>
Drain Water	<i>100 Days</i>
Change Cartridge	OFF
Clean Cover	<i>OFF</i>
Treat Wood	<i>OFF</i>
Change Filter	365 Days

Special Features

Feature	Default
Special Amperage Rule 1	No Limitation
Special Amperage Rule 2	No Limitation

Drain Mode	Disabled
Demo Mode	Disabled
Automatic GFCI Test	Disabled
Ozone Slaved to Heater Pump	<i>Yes in Setups 1 & 3</i> <i>No in Setup 2</i>

**Editable by end-user*

Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Template 40941_J 04-02-10

Configuration Options


TP400 Control Panel Features

Feature	TP400T	TP400W
Button 1	Temperature	Up
Button 2	Jets 1	Down
Button 3	Light 1	Light 1
Button 4	Unused	Jets 1
LED B1	Heat ON	Heat ON
LED B2	Jets 1	Unused
LED B3	Light 1	Light 1
LED B4	Unused	Jets 1

TP400T

50260 ►

Includes Overlay PN 12511

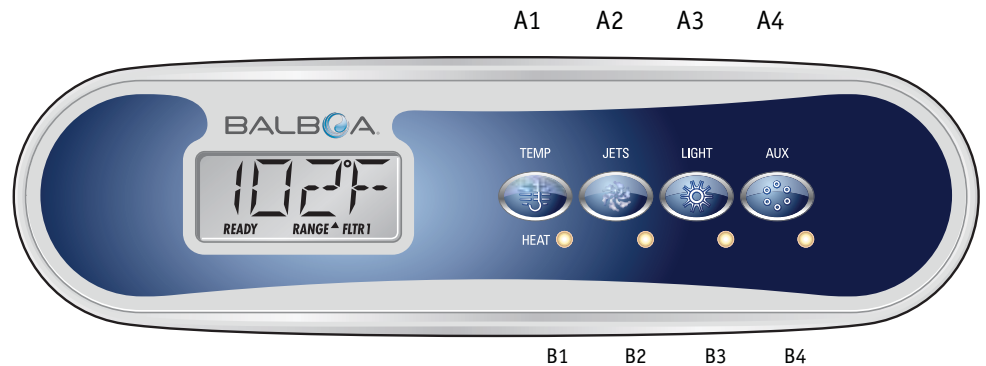

TP400W

50259 ►

Includes Overlay PN 12510



Download the User Interface and Programming Guide here:

http://service.balboa-instruments.com/zz40940_download.zip

Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options

TP600 Control Panel Features

Feature	Default
Button 1	<i>Jets 1</i>
Button 2	<i>Unused</i>
Button 3	<i>Flip</i>
Button 4	<i>Up</i>
Button 5	<i>Light 1</i>
Button 6	<i>Down</i>
LED 1	<i>Jets 1</i>
LED 2	<i>Unused</i>
LED 3	<i>Light 1</i>
LED 4	<i>Heat ON</i>

TP600

55673-05 ►
Includes overlay PN12511



Download the User Interface and Programming Guide here:
http://service.balboa-instruments.com/zz40940_download.zip
Blue Indicates New Custom Configuration Default (Setup 1)




Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options


Auxilliary Panel Features

Feature	Default
Aux Button A1	Jets 1
Aux Button A2	<i>Unused</i>
Aux Button A3	<i>Unused</i>
Aux Button A4	Light

AX10 A1	Jets 1	52683-01
AX10 A2	N/A	
AX10 A3	N/A	
AX10 A4	Light	52766



AX20 A1A2	N/A	
AX20 A1A3	N/A	
AX20 A1A4	No O/L	52802

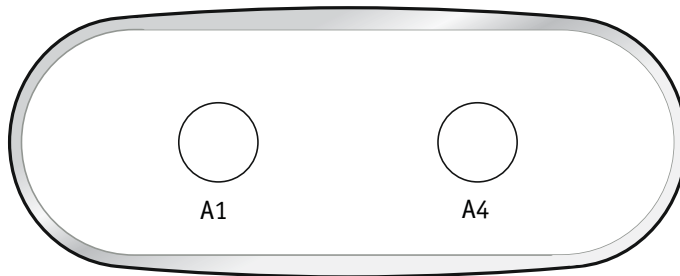

AX40	No O/L	52799
------	--------	-------

